

THESE MOLECULES ARE EITHER DEFECTIVE IN SUGAR BINDING OR AT TRANSMITTING THE ALLOSTERIC SIGNALS TO THE PROTEIN BINDING DOMAIN.



JIN JING MI CO.,LTD

■ Wire Shelving

■ Handling Equipment

■ Work Table

■ Carts

■ Stainless Products

Company Profile



Founded in May 2002, we are engaged in manufacturing wire racks as well as wire and tube furniture. Our main products cover steel-tube furniture, wire shelving, stainless steel products and handling equipment. In our domestic marketing, we serve for electronic industry, hospital and commercial use. Regarding to our export business, we have sold to several foreign countries. Right now, we are engaged in making our effort to extend it.

Paying much attention to the R&D of new products and actively developing new furniture markets, and maintain good quality to satisfy with our customers. We wish to export to more furniture markets around the world in the future.

Number 75-1, Fu Shing 2nd. Rd.,
Kaohsiung, Taiwan, R.O.C.

TEL: 886-7-3365086
FAX: 886-7-3316138

Website: <http://jjm.com.tw>
e-mail: jjm.tw@msa.hinet.net

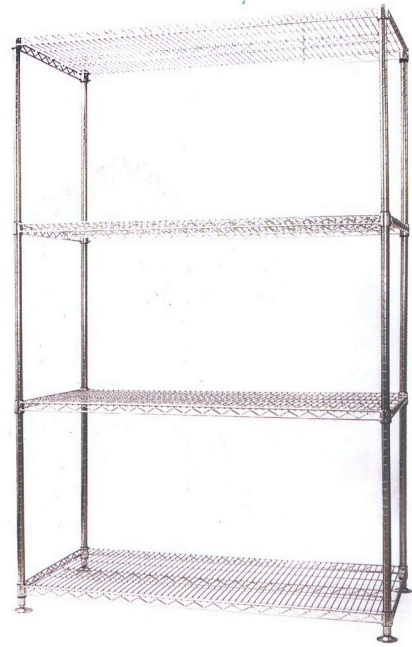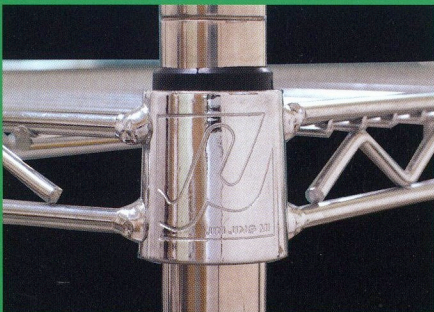

Material:

Chrome Plated (C Type) & Poly- Seal

- carbon steel 3.5~6.0 ϕ mm wire rod.

Stainless Steel (S Type)

- sus 304[18-8], 3.5~6.0 ϕ mm wire rod.

Finish:

Chrome Plated (C Type) & Poly- Seal

- chrome / nickel plated

Poly- Seal (ZC & ZG Type)

- zinc plated + clear epoxy coating.(ZC)
- zinc plated + green epoxy coating.(ZG)

Stainless Steel (S Type)

- electro-polished.

Feature:

Chrome Plated (C Type) & Poly- Seal

- Hi-tech look, economical, easy adjustment & assembly. Max. Air ventilation, min. Dust accumulation.

Load capacity: 250kgs/ per shelf.

Poly- Seal (ZC & ZG Type)

- Excellent resistance to rust and corrosion.
- Load capacity: 250kgs/ per shelf.

Stainless Steel (S Type)

- Excellent resistance to rust and corrosion.
- Load capacity: 250kgs/ per shelf.

Application:

Chrome Plated (C Type) & Poly- Seal

- Commercial use, dry storage, hospital, laboratory. Cleanroom environment (under class 1000).

Poly- Seal (ZC & ZG Type)

- Walk-in coolers & freezers, hospital, laboratory. Dry storage and bakery.

Stainless Steel (S Type)

- Walk-in coolers & freezers, hospital, laboratory. Electronic semi-conductor & flat panel(TFT/ LCM) cleanroom environment.

- Maximizes space efficiency by utilizing vertical, rather than horizontal, space.
- Modular components provide the versatility and adaptability required to quickly and easily assemble and expand the system to suit an ever-changing computing environment.
- Wire construction maximizes air circulation to dissipate heat build-up, while minimizing unsightly dust collection.
- Casters provide the mobility needed to gain instant access to service your equipment.
- Shelves can be repositioned at precise 1" (25mm) increments.
- 550 LBS. (250kg) per shelf weight load capacity. Variety of sizes and styles.

Finish Type:

● **Chrome Plated (C Type)**

● **Stainless Steel (S Type)**

Poly- Seal:

● **Zinc Plated+Clear Epoxy Coating (ZC Type)**

● **Zinc Plated+Green Epoxy Coating (ZG Type)**



Shelving Size

W x L

| Inch | mm | Inch | mm |
|-----------|------------|-----------|------------|
| 14" X 24" | 356 X 610 | 18" X 24" | 460 X 610 |
| 14" X 30" | 356 X 760 | 18" X 30" | 460 X 760 |
| 14" X 36" | 356 X 910 | 18" X 36" | 460 X 910 |
| 14" X 42" | 356 X 1070 | 18" X 42" | 460 X 1070 |
| 14" X 48" | 356 X 1220 | 18" X 48" | 460 X 1220 |
| 14" X 54" | 356 X 1370 | 18" X 54" | 460 X 1370 |
| 14" X 60" | 356 X 1520 | 18" X 60" | 460 X 1520 |
| 14" X 72" | 356 X 1830 | 18" X 72" | 460 X 1830 |
| | | | |
| 21" X 24" | 530 X 610 | 24" X 24" | 610 X 610 |
| 21" X 30" | 530 X 760 | 24" X 30" | 610 X 760 |
| 21" X 36" | 530 X 910 | 24" X 36" | 610 X 910 |
| 21" X 42" | 530 X 1070 | 24" X 42" | 610 X 1070 |
| 21" X 48" | 530 X 1220 | 24" X 48" | 610 X 1220 |
| 21" X 54" | 530 X 1370 | 24" X 54" | 610 X 1370 |
| 21" X 60" | 530 X 1520 | 24" X 60" | 610 X 1520 |
| 21" X 72" | 530 X 1830 | 24" X 72" | 610 X 1830 |
| | | | |
| 30" X 36" | 760 X 910 | | |
| 30" X 48" | 760 X 1220 | | |
| 30" X 60" | 760 X 1520 | | |
| 30" X 72" | 760 X 1830 | | |

| Model No. | W x L | Model No. | W x L |
|-----------|-------|-----------|-------|
| Chrome | mm | Stainless | mm |
| P14C | 355 | P14S | 355 |
| P26C | 650 | P26S | 650 |
| P30C | 760 | P30S | 760 |
| P34C | 860 | P34S | 860 |
| P40C | 1020 | P40S | 1020 |
| P54C | 1400 | P54S | 1400 |
| P63C | 1590 | P63S | 1590 |
| P74C | 1900 | P74S | 1900 |
| P86C | 2200 | P86S | 2200 |

| Model No. | W x L | Model No. | W x L |
|-----------|-------|-----------|-------|
| Poly-Seal | mm | Poly-Seal | mm |
| P14ZC | 355 | P14ZG | 355 |
| P26ZC | 650 | P26ZG | 650 |
| P30ZC | 760 | P30ZG | 760 |
| P34ZC | 860 | P34ZG | 860 |
| P40ZC | 1020 | P40ZG | 1020 |
| P54ZC | 1400 | P54ZG | 1400 |
| P63ZC | 1590 | P63ZG | 1590 |
| P74ZC | 1900 | P74ZG | 1900 |
| P86ZC | 2200 | P86ZG | 2200 |

Foot Plate

- Used to bolt units to the floor broader, more stable foot .

Plastic Split Sleeves

- Normally included with shelves.



Model No. AC-PS

Conductive Taper

- For conductive installations with shelves.



Model No. AC-FP01

Model No. AC-FP02



Model No. AC-FP03



- Modular components provide the versatility and adaptability required to quickly and easily assemble and expand the system to suit an ever-changing computing environment.
- Lifetime warranty against corrosion and rust, so it is perfect for damp, humid conditions as well as dry storage.
- Casters provide the mobility needed to gain instant access to service your equipment.
- Shelves can be repositioned at precise 1"(25mm) increments.
- 450 LBS. (200kg) per shelf weight load capacity. Variety of sizes and styles.


● **D Type**

Stainless Steel Solid Shelf



● **P Type**

Stainless Steel Perforated Shelf



Stainless Steel Solid Shelf & Perforated Shelf

Material:

Stainless Steel Solid Shelf (D Type)

- sus 304[18-8], 1.2mm thick plate.

Stainless Steel Perforated Shelf (P Type)

- sus 304[18-8], 1.5mm thick plate.

Finish:

Stainless Steel Solid Shelf (D Type)

- HL or #400 BA polished.

Stainless Steel Perforated Shelf (P Type)

- Stainless #400 BA punching.

Feature:

Stainless Steel Solid Shelf (D Type)

- Excellent resistance to rust and corrosion.
Load capacity: 250kgs/ per shelf.

Stainless Steel Perforated Shelf (P Type)

- Excellent resistance to rust and corrosion.
Air ventilation (punch hole :8P15mm)
Load capacity: 100kg/per shf.

Application:

- Walk-in coolers & freezers, hospital, laboratory.
Electronic semi-conductor & flat panel(TFT/ LCM)
cleanroom environment.

Shelving Size

| W x L | | | | | |
|-----------|------------|-----------|------------|-----------|------------|
| Inch | mm | Inch | mm | Inch | mm |
| 18" X 24" | 460 X 610 | 21" X 24" | 530 X 610 | 24" X 24" | 610 X 610 |
| 18" X 30" | 460 X 760 | 21" X 30" | 530 X 760 | 24" X 30" | 610 X 760 |
| 18" X 36" | 460 X 910 | 21" X 36" | 530 X 910 | 24" X 36" | 610 X 910 |
| 18" X 42" | 460 X 1070 | 21" X 42" | 530 X 1070 | 24" X 42" | 610 X 1070 |
| 18" X 48" | 460 X 1220 | 21" X 48" | 530 X 1220 | 24" X 48" | 610 X 1220 |
| 18" X 54" | 460 X 1370 | 21" X 54" | 530 X 1370 | 24" X 54" | 610 X 1370 |
| 18" X 60" | 460 X 1520 | 21" X 60" | 530 X 1520 | 24" X 60" | 610 X 1520 |
| 18" X 72" | 460 X 1830 | 21" X 72" | 530 X 1830 | 24" X 72" | 610 X 1830 |

■ The full range of JJM Accessories compliment the shelving system to fully enhance the use of the product, making it easier, and more organised.


Accessory

● S Hook



Model No. AC-SH

- Eliminates two posts per adjacent unit.
- 2 hooks required per shelf.

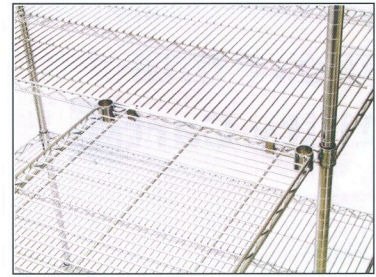


- Joins units together for maximum strength.

● Post Clamps



Model No. AC-PC

● Ledges



Model No. AC-L24C

- For stationary or mobile installations, stackable ledges prevent items from protruding or falling from shelves.

Model No.

W x L

| Chrome | Stainless | mm | inch |
|---------|-----------|------|------|
| AC-L18C | AC-L18S | 380 | 15 |
| AC-L24C | AC-L24S | 540 | 21 |
| AC-L30C | AC-L30S | 690 | 27 |
| AC-L36C | AC-L36S | 840 | 33 |
| AC-L42C | AC-L42S | 1000 | 39 |


Model No.

W x L

| Chrome | Stainless | mm | inch |
|---------|-----------|-----|------|
| AC-D14C | AC-D14S | 350 | 14 |
| AC-D18C | AC-D18S | 450 | 18 |
| AC-D21C | AC-D21S | 530 | 21 |
| AC-D24C | AC-D24S | 600 | 24 |

- Shelf contents are kept orderly with these 8" (203mm) high, snap-in-place dividers

● Divider

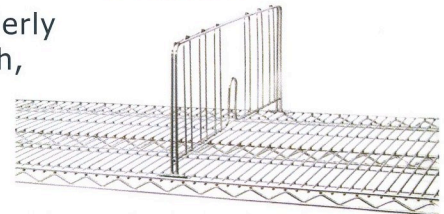

Model No. AC-D24C

● Rail



- Attach easily between posts along the width and length. Optional hooks can hang from rail.

Model No.

W x L

| Chrome | Stainless | mm | inch |
|---------|-----------|------|------|
| AC-R18C | AC-R18S | 460 | 18 |
| AC-R24C | AC-R24S | 610 | 24 |
| AC-R30C | AC-R30S | 760 | 30 |
| AC-R36C | AC-R36S | 910 | 36 |
| AC-R48C | AC-R48S | 1220 | 48 |
| AC-R60C | AC-R60S | 1520 | 60 |
| AC-R72C | AC-R72S | 1830 | 72 |


● Label Holder



Model No. AC-LH

- Easy identification of shelf contents.

● Cantilever Shelf



Model No.

W x L

| Chrome | mm | inch |
|------------|------------|---------|
| AC-CS1236C | 300 x 910 | 12 x 36 |
| AC-CS1248C | 300 x 1220 | 12 x 48 |
| AC-CS1260C | 300 x 1520 | 12 x 60 |

- Add convenient space above a storage unit.

- Lightweight, easy-to-maneuver carts can be used in a variety of ways to highlight selected items, create impulse sales or use as a mobile folding/stocking cart. The carts are offered as complete units in five two-shelf and five three-shelf models.
- These cart systems are available in the sizes and styles that will best suit your environment, letting you create a highly-effective transport system no matter what the need.

Utility Carts

Handle



Model No. UL24C

Model No. W x L

| Chrome | Stainless | mm | inch |
|--------|-----------|-----|------|
| UL18C | UL18S | 460 | 18 |
| UL21C | UL21S | 530 | 21 |
| UL24C | UL24S | 610 | 24 |




Model No. US24C

Model No. W x L

| Chrome | Stainless | mm | inch |
|--------|-----------|-----|------|
| US18C | US18S | 460 | 18 |
| US21C | US21S | 530 | 21 |
| US24C | US24S | 610 | 24 |

Model No. CA-5PU-ST

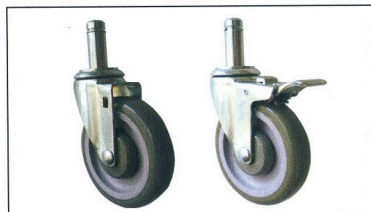

- Tread: Polyurethane (PU).
- Bearing: Sealed ball bearing.
- Fitting: 21.6mm \varnothing grip stem.
- Wheel Dia: 5" (125mm).
- Load Capacity: 240lbs/ 110kgs.

Donut Bumper



Model No. CA-DB

- Wire Shelves:** Bright, modern, sanitary appearance. Open construction minimizes dust accumulation, maximizes visibility and air circulation.
- Solid Shelves:** Ideal for transporting materials that require an expanse of flat surface. Raised ship's edge permits fast clean-up in case of liquid spills. Double thickness of 18-gauge steel at edges also gives rigidity and high strength.
- Handle:** Optional US or UL handle.
- Castors:** 5" diameter PU stem caster. 2 swivel with brake and 2 swivel without brake.
- Load Capacity:** 550lbs/ 250kgs.



Model No. UL1836C2

Height: 1020mm

Model No. W x L

| | |
|----------|--------------|
| UL1824C2 | 460 x 610 mm |
| UL1830C2 | 460 x 760 mm |
| UL1836C2 | 460 x 910 mm |
| UL2430C2 | 610 x 760 mm |
| UL2436C2 | 610 x 910 mm |

● C: Chrome Plated Shelf

● S: Stainless Steel Shelf



Model No. UL1836C3

Height: 1020mm

Model No. W x L

| | |
|----------|--------------|
| UL1824C3 | 460 x 610 mm |
| UL1830C3 | 460 x 760 mm |
| UL1836C3 | 460 x 910 mm |
| UL2430C3 | 610 x 760 mm |
| UL2436C3 | 610 x 910 mm |

● C: Chrome Plated Shelf

● S: Stainless Steel Shelf



Model No. US1836C3

Height: 1020mm

Model No. W x L

| | |
|----------|--------------|
| US1824C3 | 460 x 610 mm |
| US1830C3 | 460 x 760 mm |
| US1836C3 | 460 x 910 mm |
| US2430C3 | 610 x 760 mm |
| US2436C3 | 610 x 910 mm |

● C: Chrome Plated Shelf

● S: Stainless Steel Shelf



Model No. UL1836D3

Height: 1020mm

Model No. W x L

| | |
|----------|--------------|
| UL1824D3 | 460 x 610 mm |
| UL1830D3 | 460 x 760 mm |
| UL1836D3 | 460 x 910 mm |
| UL2430D3 | 610 x 760 mm |
| UL2436D3 | 610 x 910 mm |

- Move Supplies, Forms, Files, Office Equipment or Almost Anything Around the Office or Shop
- These cart systems are available in the sizes and styles that will best suit your environment, letting you create a highly-effective transport system no matter what the need.

Platform Hand Truck and Trolley



- Easy locking 33 1/2 inches high, folds flat against platform for compact storage or transporting.
- Platform: Powder coating with rubber mat.
Handle: Powder coating.

● Size:
W x L x H: 480 x 740 x 845mm
Capacity: 440 lbs/ 200 kgs
Caster: 4" PU caster
Model No. HT-01

● Size:
W x L x H: 590 x 890 x 840mm
Capacity: 650 lbs/ 300 kgs
Caster: 5" PU caster
Model No. HT-02



- Platform: Powder coating with rubber mat.
Handle: Galvanized.

● Size:
W x L x H: 480 x 740 x 905mm
Capacity: 440 lbs/ 200 kgs
Caster: 4" PU caster
Model No. HT-03

● Size:
W x L x H: 590 x 890 x 965mm
Capacity: 650 lbs/ 300 kgs
Caster: 5" PU caster
Model No. HT-04



- Platform: Powder coating with rubber mat.
Handle: Galvanized.
Mesh: Galvanized.

● Size:
W x L x H: 480 x 740 x 845mm
Capacity: 440 lbs/ 200 kgs
Caster: 4" PU caster
Model No. HTM-01

● Size:
W x L x H: 590 x 890 x 840mm
Capacity: 650 lbs/ 300 kgs
Caster: 5" PU caster
Model No. HTM-02



- Platform: Plastic.
Handle: Galvanized.

● Size:
W x L x H: 455 x 710 x 950mm
Capacity: 250 lbs/ 120 kgs
Caster: 4" PU caster
Model No. HTP-01

● Size:
W x L x H: 609 x 914 x 980mm
Capacity: 650 lbs/ 250 kgs
Caster: 5" PU caster
Model No. HTP-02



- Platform: Powder coating.
Railing: Galvanized.

● Size:
W x L x H: 770 x 1235 x 1270mm
Capacity: 880 lbs/ 400 kgs
Caster: 6" PU caster
Model No. HTR-01

● Size:
W x L x H: 770 x 1235 x 1330mm
Capacity: 1100 lbs/ 500 kgs
Caster: 8" PU caster
Model No. HTR-02

■ The full range of JJM Casters provide you caster wheels include rubber, thermoplastic rubber, polyurethane, polypropylene, polyamide, steel, pneumatic and more. Our caster wheels can be used as replacement wheels for your current casters. You can customize many of our casters with a variety of options such as swivel locks, wheel brakes.

Casters

● **Fittings: Optional meet with your need.**



Grip Stem



Plate



Threaded Stem

● **Bearings**



Plain Bearings



Roller Bearings



Sealed Ball Bearings



Precision Ball Bearings

● **Donut Bumper**



Model No. CA-DB

● **Wheel Dia:** 3" (75mm).
4" (100mm).
5" (125mm).
6" (160mm).
8" (200mm).

● **Wheel:** Polyurethane (PU).
Thermoplastic rubber (TPR).
Polypropylene (PP).
Polyamide (PA).
Elastic rubber.

● **Bearing:** Plain bearings.
Roller bearing.
Sealed ball bearings.
Precision ball bearing.

● **Housing:** Pressed steel, zinc- chromatised.
Double ball bearing swivel head, wheel axle with nut.
Stainless steel,
Double ball bearing swivel head, wheel axle with nut.

Model No. CA-2PU-TH



● Tread: Polyurethane (PU).
● Bearing: Sealed ball bearing.
● Fitting: 3/8" φ thread stem.
● Wheel Dia: 2" (50mm).
● Load Capacity: 75lbs/ 35kgs.

Model No. CA-5PU-ST



● Tread: Polyurethane (PU).
● Bearing: Sealed ball bearing.
● Fitting: 21.6mm φ grip stem.
● Wheel Dia: 5" (125mm).
● Load Capacity: 240lbs/ 110kgs

Model No. CA-5PE-ST



● Tread: Conductive.
● Bearing: Sealed ball bearing.
● Fitting: 21.6mm φ grip stem.
● Wheel Dia: 5" (125mm).
● Load Capacity: 220lbs/ 100kgs.



**Model No.
5TP-PL-RI**



**Model No.
5TP-PL-BR**

● Tread: Thermoplastic rubber (TPR).
● Bearing: Precision ball bearing, sealed.
● Fitting: Plate.
● Wheel Dia: 3" (75mm), 4" (100mm), 5" (125mm).
● Load Capacity: 3"-150lbs/ 70kgs.
4"-190lbs/ 90kgs.
5"-240lbs/ 110kgs.



**Model No.
5PA-PL-RI**



**Model No.
5PA-PL-BR**

● Wheel centre: Polyamide (PA).
● Tread: Elastic rubber.
● Bearing: Roller ball bearing.
● Fitting: Plate.
● Wheel Dia: 4" (100mm), 5" (125mm).
● Load Capacity: 4"-180lbs/ 85kgs.
5"-240lbs/ 110kgs.



**Model No.
5PA-PL-RI**



**Model No.
5PA-PL-BR**

● Wheel: Polyamide (PA), white or black.
● Bearing: Roller bearing or plain bearing.
● Fitting: Plate.
● Wheel Dia: 5" (125mm), 6" (160mm), 8" (200mm).
● Load Capacity: 5"-660lbs/ 300kgs.
6"-770lbs/ 350kgs.
8"-880lbs/ 400kgs.



**Model No.
5APU-PL-RI**



**Model No.
5APU-PL-BR**

● Wheel centre: Aluminum.
● Tread: Polyurethane (PU).
● Bearing: Double precision ball bearing.
● Fitting: Plate.
● Wheel Dia: 5" (125mm), 6" (160mm), 8" (200mm).
● Load Capacity: 5"-880lbs/ 400kgs.
6"-990lbs/ 450kgs.
8"-1100lbs/ 500kgs.

- **Safe Storage:** Protects valuable materials and sensitive items from loss or pilferage.
- **Ready View of Contents:** Heavy-gauge open wire construction keeps the entire contents of the truck visible at all times, making it easy to check inventory.
- **Double Door:** Each door opens 270 degrees and can be secured along the sides of the unit.
- **Shipped Knocked-Down:** Saves on freight costs. Easily assembled.


Security Carts & Enclosure Carts

Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

- **Safe Transportation:** Mobile, security trucks provide the advantage of quick, protective transportation.
- **Easy Cleaning of Storage Areas:** Mobile units move easily from walls to allow thorough cleaning of floors and walls.
- **Mobile Units:** Available in Standard and Heavy-Duty models. Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.
- **Stationary Units:** Posts have leveling feet to compensate for uneven surfaces.



Model No. SEC-1836C



Lock System



Utility Handle

Model No. SEC-2460C




| Model No. | W x L | |
|------------------|------------|-----------|
| | mm | inch |
| SEC-1836C | 500 x 950 | 18" x 36" |
| SEC-1848C | 500 x 1250 | 18" x 48" |
| SEC-1860C | 500 x 1550 | 18" x 60" |
| SEC-1872C | 500 x 1830 | 18" x 72" |
| SEC-2448C | 650 x 1250 | 24" x 48" |
| SEC-2460C | 650 x 1550 | 24" x 60" |
| SEC-2472C | 650 x 1830 | 24" x 72" |
| Stainless | | |
| SEC-1836S | 500 x 950 | 18" x 36" |
| SEC-1848S | 500 x 1250 | 18" x 48" |
| SEC-1860S | 500 x 1550 | 18" x 60" |
| SEC-1872S | 500 x 1830 | 18" x 72" |
| SEC-2448S | 650 x 1250 | 24" x 48" |
| SEC-2460S | 650 x 1550 | 24" x 60" |
| SEC-2472S | 650 x 1830 | 24" x 72" |



Model No. EC-1836C

| Model No. | W x L | |
|------------------|------------|-----------|
| | mm | inch |
| EC-1836C | 500 x 950 | 18" x 36" |
| EC-1848C | 500 x 1250 | 18" x 48" |
| EC-1860C | 500 x 1550 | 18" x 60" |
| EC-1872C | 500 x 1830 | 18" x 72" |
| EC-2448C | 650 x 1250 | 24" x 48" |
| EC-2460C | 650 x 1550 | 24" x 60" |
| EC-2472C | 650 x 1830 | 24" x 72" |
| Stainless | | |
| EC-1836S | 500 x 950 | 18" x 36" |
| EC-1848S | 500 x 1250 | 18" x 48" |
| EC-1860S | 500 x 1550 | 18" x 60" |
| EC-1872S | 500 x 1830 | 18" x 72" |
| EC-2448S | 650 x 1250 | 24" x 48" |
| EC-2460S | 650 x 1550 | 24" x 60" |
| EC-2472S | 650 x 1830 | 24" x 72" |

Model No. CA-5PU-ST

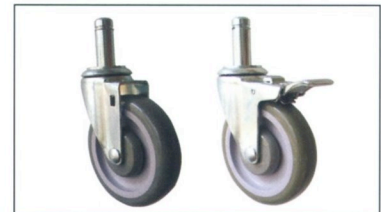

- **Tread:** Polyurethane (PU).
- **Bearing:** Sealed ball bearing.
- **Fitting:** 21.6mm ϕ grip stem.
- **Wheel Dia:** 5" (125mm).
- **Load Capacity:** 240lbs/ 110kgs.

- **Donut Bumper**



Model No. CA-DB

- Built for cleanliness and stability. Units are shipped knocked down and can be assembled in minutes without tools.
- Optional under shelf or H frame to enforce strength of the construction.

● **CTS Type**

Stainless Steel Solid Work Table



Model No. CTS-3048

| Model No. | W x L x H | | |
|-----------|------------------|--------------|--|
| Stainless | mm | inch | |
| CTS-3048 | 750 x 1260 x 750 | 30 x 50 x 30 | |
| CTS-3060 | 750 x 1560 x 750 | 30 x 62 x 30 | |
| CTS-3072 | 750 x 1860 x 750 | 30 x 74 x 30 | |

● **WTD & WTP Type**

Stainless Steel Solid Work Table with Drawers



Model No. W x L x H

| Stainless | mm | inch | |
|-------------|------------------|--------------|--|
| WTD-3060-3D | 750 x 1500 x 800 | 30 x 60 x 31 | |



Model No. W x L x H

| Stainless | mm | inch | |
|-------------|------------------|--------------|--|
| WTD-2460-3D | 600 x 1500 x 800 | 24 x 60 x 31 | |

Stainless Steel Solid & Perforated Clean Work Table

Material:

- sus 304[18-8], 1.2mm thick plate.
- sus 304[18-8], 1.5mm thick plate with 8P15mm perforated.

Finish:


- HL or #400 BA polished.
- Stainless #400 BA punching.

Feature:

- Excellent resistance to rust and corrosion.
- Excellent resistance to rust and corrosion. Air ventilation (punch hole :8P15mm).

Application:

- Walk-in coolers & freezers, hospital, laboratory. Electronic semi-conductor & flat panel(TFT/ LCM) cleanroom environment.



Model No. W x L x H

| Stainless | mm | inch | |
|-------------|------------------|--------------|--|
| WTD-2448-1D | 600 x 1200 x 800 | 24 x 48 x 31 | |



Model No. W x L x H

| Stainless | mm | inch | |
|-------------|------------------|--------------|--|
| WTP-3060-3D | 750 x 1500 x 800 | 30 x 60 x 31 | |

- JJM specializes in fabricating storage system of electronic industry, such as nitrogen cabinet, TFT/LCM processing tray carts
- Sizes made by customer request.

Made to Order

Cleanroom Equipment

Nitrogen Cabinet



Description:

- SUS 304 stainless steel, 1.2 or 1.5mm thick plate.
- Aluminum utility handle.
- Reinforce glass, 5.0mm thick plate.
- Optional flow meter to control the flow.
- With adjustable foot plate & 3" casters.
- Size made by order.



Mask Nitrogen Cabinet



Description:

- SUS 304 stainless steel, 1.2 or 1.5mm thick plate.
- Aluminum utility handle.
- Reinforce glass, 5.0mm thick plate.
- Optional flow meter to control the flow.
- With adjustable foot plate & 3" casters.
- Size made by order.


Stainless Steel Storage Cabinet



Description:


- SUS 304 stainless steel, 1.2 or 1.5mm thick plate.
- With adjustable foot plate & casters.
- Size made by order.

TFT/LCM Processing Tray Carts

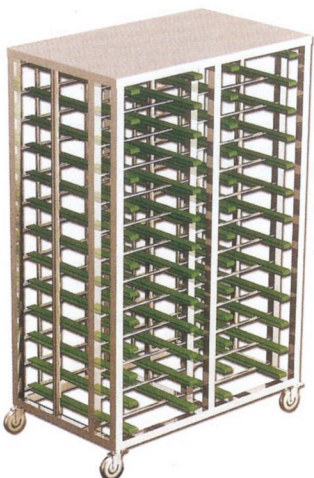

Description:

- SUS 304 stainless steel, 1.2 or 1.5mm thick plate.
- With conductive casters & rubber mat.
- Size made by order.

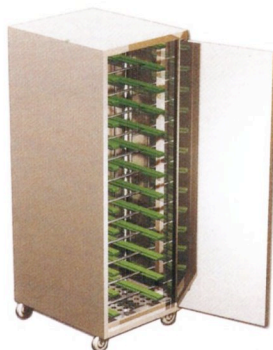

Clean Bench

Description:

- Vertical laminar flow stand type clean work console unit guaranteed to 10-100grade is a new design conceived from economy in mind at the interest of customers to provide the most suitable optimum clean working environment for high-tech manufacturing industry